

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number  
**WO 2005/095468 A2**

(51) International Patent Classification<sup>7</sup>: **C08F 10/00**

(21) International Application Number:  
PCT/EP2005/002479

(22) International Filing Date: 8 March 2005 (08.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
04101020.8 12 March 2004 (12.03.2004) EP  
60/554,110 17 March 2004 (17.03.2004) US

(71) Applicant (*for all designated States except US*): **BASELL  
POLYOLEFINE GMBH** [DE/DE]; Brühler Strasse 60,  
50389 Wesseling (DE).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **RESCONI,  
Luigi** [IT/IT]; Via Palestro, 101, I-44100 Ferrara (IT).  
**MOSCARDI, Gilberto** [IT/IT]; Via Fossato, 26, I-44100  
Ferrara (IT). **FAIT, Anna** [IT/IT]; Via Palestro, 101,  
I-44100 Ferrara (IT).

(74) Agent: **SACCO, Marco**; Basell Poliolefine Italia S.p.A.,  
Intellectual Property, P. le G. Donegani, 12, I-44100 Ferrara  
(IT).

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *without international search report and to be republished  
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: CATALYST SYSTEM FOR THE POLYMERIZATION OF OLEFIN

(57) Abstract: A catalyst system solution obtainable by a process comprising the following steps: a) contacting a solution of methy-  
lalumoxane in an aromatic solvent (solvent a) with a solution of one or more organ-aluminium in a solvent (solvent b), or a solution  
of one or more alumoxanes different from methylalumoxane in a solvent (solvent b); (b) when solvent b) is an aromatic solvent or  
if solvent b) has a boiling point lower than solvent a) add to the solution formed in step a) an alifatic solvent (solvent c) having a  
boiling point higher than solvent a) and solvent b); or (c) solubilizing a metallocene compound in the solution obtained in step a) or  
in step b); and (d) substantially removing solvent a) or solvent a) and solvent b) from the solution.



WO 2005/095468 A2

**Title****Catalyst system for the polymerization of olefin**

The present invention relates to a soluble metallocene-based catalyst system useful in slurry and solution polymerization of olefins.

Metallocene compounds are well known catalyst-component for the polymerization of olefins, especially alpha-olefin. Unsupported metallocene-based catalyst systems are prepared by reacting metallocene compounds and alumoxanes in a solvent. The most commonly used activator is methylalumoxane in toluene solution. Main drawbacks of MAO are its relatively high cost, and the large amount needed (typically, Al/Zr =  $10^2$ - $10^4$  molar are used). Moreover, from the standpoints of polymer applications (for example, in view of possible food applications of the final polymer) and process waste and recycle management, the presence of toluene should be avoided or reduced as much as possible, because of issues related to its toxicity.

CA 2200243 solves the problem of the use of toluene by adding to a toluene solution of methylalumoxane (MAO) a paraffin and then distilling off the toluene. Even if toluene was removed, in the resulting mixture MAO is not solubilized but is present as a suspension, as shown in the examples. In US 6,444,607 a catalyst solution for polymerizing alpha-olefin is obtained by reacting a metallocene compound with an activator, adding one or more alpha-olefins and mixing with at least 10 parts by volume of an alifatic hydrocarbon. The solubility of the cationically activated metallocene compound is in this way increased by reaction with one or more alpha olefins.

The applicant has found a new process for the preparation of a soluble catalyst system with a reduced toluene content and that allows to obtain polymers of higher molecular weight (as shown for example by its intrinsic viscosity value, I.V.), compared to those achievable by MAO/toluene-activated metallocenes. Moreover, the catalyst system obtained with this procedure shows an improved polymerization productivity, referred to the amount of methylalumoxane employed, and does not suffer from significant loss of activity over time. An object of the present invention is a catalytic solution obtainable by a process comprising the following steps:

- a) contacting a solution of methylalumoxane (MAO) in an aromatic solvent (solvent a) with a solution in a solvent (solvent b) of one or more alumoxanes different from methylalumoxane or one or more organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , where the U substituents, same or different, are hydrogen atoms, halogen


atoms, or hydrocarbon groups containing from 2 to 20 carbon atoms, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen and at least at least one U is different from hydrogen, and j ranges from 0 to 1, being also a non-integer number;

- (b) when solvent b) is an aromatic solvent or solvent b) has a boiling point lower than solvent a) adding to the solution formed in step a) an alifatic solvent (solvent c) having a boiling point higher than solvent a) and solvent b);
- (c) solubilizing a metallocene compound in the solution obtained in step a) or in step b); and
- (d) substantially removing the aromatic solvent(s) (solvent a) or solvent a) and solvent b). if step b) has been carried out) from the solution.


wherein the content of the aromatic solvent(s) in the solution obtained in step d) is lower than 2% by weight; preferably equal to or lower than 1% by weight; the molar concentration of the metallocene compound in the final solution obtained in step d) ranges from  $1 \cdot 10^{-5}$  to  $1 \cdot 10^{-1}$  mol/l, and the molar ratio between methylalumoxane and the organo-aluminium compound or the molar ratio between methylalumoxane and the alumoxane used in step b) ranges from 10:1 to 1:10; preferably it ranges from 5:1 to 1:5; more preferably from 3:1 to 1:3.

Methylalumoxane (MAO) used in step a) can be obtained by reacting water with trimethylaluminum. In this reaction the molar ratio of Al/water is preferably comprised between 1:1 and 100:1.

The metylalumoxane used in the catalyst according to the invention is considered to be linear, branched or cyclic compounds containing at least one compound of the formula:



wherein  $n^1$  is 0 or an integer of from 1 to 40; or a compound of the formula:




in the case of cyclic compounds, wherein  $n^2$  is an integer from 2 to 40.

In the organo-aluminium compound of formula  $\text{H}_j\text{AlU}_{3-j}$  or  $\text{H}_j\text{Al}_2\text{U}_{6-j}$ , preferably the U substituents, equal to or different from each other, are linear or branched  $\text{C}_2$ - $\text{C}_{20}$ -alkyl or  $\text{C}_3$ - $\text{C}_{20}$ -cyclalkyl, radicals. Preferably U is a linear or branched  $\text{C}_2$ - $\text{C}_{20}$ -alkyl radical; more

preferably U is an ethyl, a n-propyl, a iso-propyl, a n-butyl, an iso-butyl, a tert-butyl, a hexyl or an octyl radical;


Preferred organo aluminium compounds are triethylaluminum (TEA), triisobutylaluminum (TIBA), triisohexylaluminum, triisooctylaluminum.

Alumoxanes that can be used in the solution of solvent b) are compounds containing at least one group of the type:




wherein the substituents U, same or different, are hydrogen atoms, halogen atoms, C<sub>2</sub>-C<sub>20</sub>-alkyl, C<sub>3</sub>-C<sub>20</sub>-cyclalkyl, C<sub>6</sub>-C<sub>20</sub>-aryl, C<sub>7</sub>-C<sub>20</sub>-alkylaryl or C<sub>7</sub>-C<sub>20</sub>-arylalkyl radicals, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen and from hydrogen atom.

In particular, alumoxanes of the formula:



can be used in the case of linear compounds, wherein n<sup>1</sup> is 0 or an integer of from 1 to 40 and the substituents U are defined as above; or alumoxanes of the formula:



can be used in the case of cyclic compounds, wherein n<sup>2</sup> is an integer from 2 to 40 and the U substituents are defined as above.

They can be obtained by reacting water with alkyl or aryl aluminium compounds. Particularly interesting alumoxanes are those described in WO 99/21899 and in WO01/21674 in which the alkyl and aryl groups have specific branched patterns.

Non-limiting examples of aluminium compounds that can be reacted with water to give suitable alumoxanes are described in WO 99/21899 and WO01/21674, are:

tris(2,3,3-trimethyl-butyl)aluminium,	tris(2,3-dimethyl-hexyl)aluminium,
tris(2,3-dimethyl-butyl)aluminium,	tris(2,3-dimethyl-pentyl)aluminium,
tris(2,3-dimethyl-heptyl)aluminium,	
tris(2-methyl-3-ethyl-pentyl)aluminium,	tris(2-methyl-3-ethyl-hexyl)aluminium,
tris(2-methyl-3-ethyl-heptyl)aluminium,	tris(2-methyl-3-propyl-hexyl)aluminium,
tris(2-ethyl-3-methyl-butyl)aluminium,	tris(2-ethyl-3-methyl-pentyl)aluminium,

tris(2,3-diethyl-pentyl)aluminium, tris(2-propyl-3-methyl-butyl)aluminium, tris(2-isopropyl-3-methyl-butyl)aluminium, tris(2-isobutyl-3-methyl-pentyl)aluminium, tris(2,3,3-trimethyl-pentyl)aluminium, tris(2,3,3-trimethyl-hexyl)aluminium, tris(2-ethyl-3,3-dimethyl-butyl)aluminium, tris(2-ethyl-3,3-dimethyl-pentyl)aluminium, tris(2-isopropyl-3,3-dimethyl-butyl)aluminium, tris(2-trimethylsilyl-propyl)aluminium, tris(2-methyl-3-phenyl-butyl)aluminium, tris(2-ethyl-3-phenyl-butyl)aluminium, tris(2,3-dimethyl-3-phenyl-butyl)aluminium, tris(2-phenyl-propyl)aluminium, tris[2-(4-fluoro-phenyl)-propyl]aluminium, tris[2-(4-chloro-phenyl)-propyl]aluminium, tris[2-(3-isopropyl-phenyl)-propyl]aluminium, tris(2-phenyl-butyl)aluminium, tris(3-methyl-2-phenyl-butyl)aluminium, tris(2-phenyl-pentyl)aluminium, tris[2-(pentafluorophenyl)-propyl]aluminium, tris[2,2-diphenyl-ethyl]aluminium and tris[2-phenyl-2-methyl-propyl]aluminium, as well as the corresponding compounds wherein one of the hydrocarbyl groups is replaced with a hydrogen atom, and those wherein one or two of the hydrocarbyl groups are replaced with an isobutyl group.

Preferred alumoxanes suitable for use according to the present invention are, tetra-(isobutyl)alumoxane (TIBAO), tetra-(2,4,4-trimethyl-pentyl)alumoxane (TIOAO), tetra-(2,3-dimethylbutyl)alumoxane (TDMBAO) and tetra-(2,3,3-trimethylbutyl)alumoxane (TTMBAO).

Solvent a) that can be used to obtain a solution of methylalumoxane is an aromatic solvent having from 6 to 12 carbon atoms. Preferably benzene, toluene or xylene are used.

According to step a) the organo-aluminum compound or alumoxane different from methylalumoxane is solubilized in solvent b). Suitable solvents are aromatic or alifatic hydrocarbon solvents or mixtures thereof, suitable aromatic solvents have from 6 to 12 carbon atoms such as benzene, toluene or xylene; suitable alifatic solvents have from 5 to 30 carbon atoms such as pentane, heptane, isododecane, isohexadecane, isoeicosane mixtures of alifatic solvents can be used such as ISOPAR® solvent having an average molecular weight ranging from 100 to 200, preferably ranging from 160 to 180 (ISOPAR® L). Preferably solvent b) is an alifatic hydrocarbon having from 8 to 30 carbon atom (and in this case solvent c) is not used); more preferably it is isododecane, decahydronaphthalene and isohexadecane. Preferably solvent b) has a boiling point higher than 110°C.

In the case that solvent b) is an aromatic compound or a mixture of solvents containing an aromatic compound, or solvent b) has a boiling point lower than solvent a), solvent c), according to the process of the present invention, is used. Solvent c) is an alifatic compound

or a mixtures of alifatic compounds having a boiling point higher than solvent a) and solvent b). Suitable solvents c) have from 8 to 30 carbon atoms; examples of solvent c) are octane, decane, isododecane, decahydronaphthalene, isohexadecane, isoeicosane ISOPAR®. Preferably solvent c) has a boiling point higher than 110°C.

Preferably the process of the present invention comprises the following steps:


- a1) contacting a solution of methylalumoxane in an aromatic solvent (solvent a) with a solution of one or more organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$  in an alifatic solvent (solvent b) having a boiling point higher than solvent a), where the U substituents, same or different, are hydrogen atoms, halogen atoms, or hydrocarbon groups containing from 2 to 20 carbon atoms, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen and at least one U is different from hydrogen, and j ranges from 0 to 1, being also a non-integer number;
- b1) solubilizing a metallocene compound in the solution obtained in step a1); and
- c1) substantially removing solvent a) from the solution;

wherein the content of solvent a) in the solution obtained in step c1) is lower than 2% by weight; preferably it is equal to or lower than 1% by weight; and the molar concentration of the metallocene compound in the final solution obtained in step c1) ranges from  $10^{-5}$  to  $10^{-1}$  mol/l, and the molar ratio between methylalumoxane and the organo-aluminium compound ranges from 10:1 to 1:10; preferably it ranges from 5:1 to 1:5; more preferably from 3:1 to 1:3.


For the purpose of the present invention metallocene compounds are compounds having at least one cyclopentadienyl moiety linked through a  $\pi$ -bond to the central metal atom belonging to group 4, 5 of the Periodic Table of the Elements; preferably the central metal is zirconium, titanium or hafnium.

The molar concentration of the metallocene compound in the catalyst system ranges preferably from  $10^{-5}$  to  $10^{-2}$  mol/l more preferably from  $10^{-4}$  to  $10^{-2}$  mol/l.


A preferred class of metallocene compounds have the following formulas (I), (II) or (III).

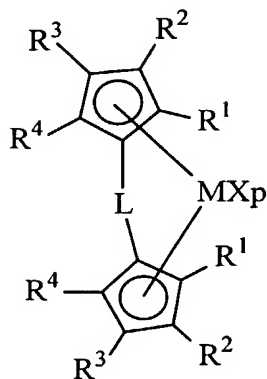

(I)

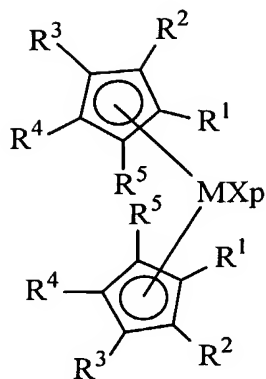

(II)



(III)

wherein

M is a transition metal belonging to group 4, 5 or to the lanthanide or actinide groups of the Periodic Table of the Elements; preferably M is zirconium, titanium or hafnium; the substituents X, equal to or different from each other, are monoanionic sigma ligands selected from the group consisting of hydrogen, halogen,  $R^6$ ,  $OR^6$ ,  $OCOR^6$ ,  $SR^6$ ,  $NR^6_2$  and  $PR^6_2$ , wherein  $R^6$  is a linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$  alkyl,  $C_3$ - $C_{20}$  cycloalkyl,  $C_6$ - $C_{20}$  aryl,  $C_7$ - $C_{20}$  alkylaryl or  $C_7$ - $C_{20}$  arylalkyl group, optionally containing one or more Si or Ge atoms; the substituents X are preferably the same and are preferably hydrogen, halogen,  $R^6$  or  $OR^6$ ; wherein  $R^6$  is preferably a  $C_1$ - $C_7$  alkyl,  $C_6$ - $C_{14}$  aryl or  $C_7$ - $C_{14}$  arylalkyl group, optionally containing one or more Si or Ge atoms; more preferably, the substituents X are Cl or Me.

p is an integer equal to the oxidation state of the metal M minus 2; preferably p is 2;

L is a divalent bridging group selected from  $C_1$ - $C_{20}$  alkylidene,  $C_3$ - $C_{20}$  cycloalkylidene,  $C_6$ - $C_{20}$  arylidene,  $C_7$ - $C_{20}$  alkylarylidene, or  $C_7$ - $C_{20}$  arylalkylidene radicals optionally containing heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements, and silylidene radical containing up to 5 silicon atoms such as  $SiMe_2$ ,  $SiPh_2$ ; preferably L is a divalent group  $(ZR^7_m)_n$ ; Z being C, Si, Ge, N or P, and the  $R^7$  groups, equal to or different from each other, being hydrogen or linear or branched, saturated or unsaturated  $C_1$ - $C_{20}$  alkyl,  $C_3$ - $C_{20}$  cycloalkyl,  $C_6$ - $C_{20}$  aryl,  $C_7$ - $C_{20}$  alkylaryl or  $C_7$ - $C_{20}$  arylalkyl groups or two  $R^7$  can form a alifatic or aromatic  $C_4$ - $C_7$  ring;

more preferably L is selected from  $Si(CH_3)_2$ ,  $SiPh_2$ ,  $SiPhMe$ ,  $SiMe(SiMe_3)$ ,  $CH_2$ ,  $(CH_2)_2$ ,  $(CH_2)_3$  or  $C(CH_3)_2$ ;

$R^1$ ,  $R^2$ ,  $R^3$ ,  $R^4$  and  $R^5$ , equal to or different from each other, are hydrogen atoms, or linear or

branched, saturated or unsaturated C<sub>1</sub>-C<sub>20</sub>-alkyl, C<sub>3</sub>-C<sub>20</sub>-cycloalkyl, C<sub>6</sub>-C<sub>20</sub>-aryl, C<sub>7</sub>-C<sub>20</sub>-alkylaryl, or C<sub>7</sub>-C<sub>20</sub>-arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements; or two adjacent R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup> form one or more 3-7 membered ring optional containing heteroatoms belonging to groups 13-17 of the periodic table; such as to form with the cyclopentadienyl moiety the following radicals: indenyl; mono-, di-, tri- and tetra-methyl indenyl; 2-methyl indenyl, 3-'butyl-indenyl, 2-isopropyl-4-phenyl indenyl, 2-methyl-4-phenyl indenyl, 2-methyl-4,5 benzo indenyl; 3-trimethylsilyl-indenyl; 4,5,6,7-tetrahydroindenyl; fluorenyl; 5,10-dihydroindeno[1,2-b]indol-10-yl; N-methyl- or N-phenyl-5,10-dihydroindeno [1,2-b]indol-10-yl; 5,6-dihydroindeno[2,1-b]indol-6-yl; N-methyl-or N-phenyl-5,6-dihydroindeno[2,1-b]indol-6-yl; azapentalene-4-yl; thiapentalene-4-yl; azapentalene-6-yl; thiapentalene-6-yl; mono-, di- and tri-methyl-azapentalene-4-yl, 2,5-dimethyl-cyclopenta[1,2-b:4,3-b']-dithiophene.

A is a NR<sup>8</sup> group or an oxygen or sulfur atom, wherein the group R<sup>8</sup> is linear or branched, cyclic or acyclic, C<sub>1</sub>-C<sub>20</sub>-alkyl, C<sub>2</sub>-C<sub>20</sub> alkenyl, C<sub>2</sub>-C<sub>20</sub> alkynyl, C<sub>6</sub>-C<sub>20</sub>-aryl, C<sub>7</sub>-C<sub>20</sub>-alkylaryl or C<sub>7</sub>-C<sub>20</sub>-arylalkyl radicals, optionally containing heteroatoms belonging to groups 13 or 15-17 of the Periodic Table of the Elements; preferably A is a NR<sup>8</sup> group wherein R<sup>8</sup> is selected from the group consisting of methyl, ethyl, n-propyl, isopropyl, n-butyl, t-butyl, phenyl, p-n-butyl-phenyl, benzyl, cyclohexyl and cyclododecyl; more preferably R<sup>8</sup> is t-butyl.

Non limiting examples of compounds belonging to formulas (I), (II) or (III) are the following compounds (when possible in either their meso or racemic isomers, or mixtures thereof):

dimethylsilanediylbis(indenyl)zirconium dichloride,  
 dimethylsilanediylbis(2-methyl-4-phenylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2-methyl-4-naphthylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2-methylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2-methyl-4-isopropylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2,4-dimethylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2-methyl-4,5-benzoindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2,4,7-trimethylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2,4,6-trimethylindenyl)zirconium dichloride,  
 dimethylsilanediylbis(2,5,6-trimethylindenyl)zirconium dichloride,  
 dimethylsilanediylbis (2-isopropyl-4-(4'-tert-butyl)-phenyl-Indenyl)(2,7-Methyl-4-(4'-tert-butyl)-Phenyl-Indenyl)-zirconium dichloride,

dimethylsilanediylbis (2-isopropyl-4-(4'-tert-butyl)-phenyl-Indenyl)(2-Methyl-4-(4'-tert-butyl)-Phenyl-Indenyl)-zirconium dichloride,  
dimethylsilanediylbis (2-isopropyl-4-phenyl-Indenyl)(2-Methyl-4-Phenyl-Indenyl)-zirconium dichloride,  
methyl(phenyl)silanediylbis(2-methyl-4,6-diisopropylindenyl)-zirconium dichloride,  
methyl(phenyl)silanediylbis(2-methyl-4-isopropylindenyl)-zirconium dichloride,  
1,2-ethylenebis(indenyl)zirconium dichloride,  
1,2-ethylenebis(4,7-dimethylindenyl)zirconium dichloride,  
1,2-ethylenebis(2-methyl-4-phenylindenyl)zirconium dichloride,  
1,2-ethylenebis(2-methyl-4,6-diisopropylindenyl)zirconium dichloride,  
1,2-ethylenebis (2-methyl-4,5-benzoindenyl)zirconium dichloride,  
dimethylsilanediyl(3-tert-butyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
dimethylsilandiylbis-6-(3-methylcyclopentadienyl-[1,2-b]-thiophene) dichloride;  
dimethylsilandiylbis-6-(4-methylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(4-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(4-ter-butylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(3-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(2,5-dichloride-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium di methyl;  
dimethylsilandiylbis-6-[2,5-dichloride-3-(2-methylphenyl)cyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;  
dimethylsilandiylbis-6-[2,5-dichloride-3-(2,4,6-trimethylphenyl)cyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;  
dimethylsilandiylbis-6-[2,5-dichloride-3-mesitylenecyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;  
dimethylsilandiylbis-6-(2,4,5-trimethyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
dimethylsilandiylbis-6-(2,5-diethyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-diisopropyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-diter-butyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-ditrimethylsilyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilyl(tert-butylamido)(N-methyl-2-methyl-5,6-dihydroindeno[2,1-b]indol-6-yl)dimethyl titanium

dimethylsilyl(tert-butylamido)(N-methyl-2-methoxy-5,6-dihydroindeno[2,1-b]indol-6-yl)dimethyl titanium

dimethylsilyl(tert-butylamido)(N-methyl-2-methyl-1,8-dihydroindeno[2,1-b]pyrrol-6-yl)dimethyl titanium

dimethylsilyl(tert-butylamido)(N-methyl-2-methyl-1,8-dihydroindeno[2,1-b]pyrrol-6-yl)dimethyl titanium

dimethylsilyl(tert-butylamido)(N-ethyl-5,6-dihydroindeno[2,1-b]indol-6-yl)dimethyl titanium

dimethylsilyl(tert-butylamido)(2,5-dimethyl-7*H*-thieno[3',2':3,4]cyclopenta[1,2-*b*]thiophen-7-yl) dimethyl titanium

dimethylsilyl(tert-butylamido)(indenyl)dimethyl titanium

dimethylsilyl(tert-butylamido)(2-methyl-indenyl)dimethyl titanium

dimethylsilyl{(2-methyl-1-indenyl)-7-(2,5-dimethyl-cyclopenta[1,2-*b*:4,3-*b'*]-dithiophene)} zirconium dichloride

dimethylsilyl{(2,4,7-trimethyl-1-indenyl)-7-(2,5-dimethylcyclopenta[1,2-*b*:4,3-*b'*]-dithiophene)}zirconium dichloride

dimethylsilyl{(2,4,6-trimethyl-1-indenyl)-7-(2,5-dimethylcyclopenta[1,2-*b*:4,3-*b'*]-dithiophene)}zirconium dichloride

as well as the corresponding dimethyl, chloromethyl, dihydro and  $\eta^4$ -butadiene compounds. Suitable metallocene complexes belonging to formulas (I), or (II) are described in WO 98/22486, WO 99/58539 WO 99/24446, USP 5,556,928, WO 96/22995, EP-485822, EP-485820, USP 5,324,800, EP-A-0 129 368, USP 5,145,819, EP-A-0 485 823, WO 01/47939, WO 01/44318 and PCT/EP02/13552.

Steps d) and c1) can be carried out according to the procedures known in the art. Preferably step d) or c1) is carried out by distilling the solution containing the catalyst system obtained in step b) or b1), the distillation can be carried out at atmospheric pressure or at reduced pressure in order to use lower distillation temperatures.

The total aluminium/metal molar ratio of the catalyst system obtainable according to the present invention ranges from 10:1 to 100000:1, preferably from 10:1 to 50000:1; more preferably from 10:1 to 10000:1; even more preferably from 50:1 to 1000:1.

The catalyst system obtainable according to the process of the present invention shows a high activity, referred to the amount of methylalumoxane employed, said activity being retained also if this catalyst is used after a long period of time and allows to obtain polymer having a molecular weight higher than a conventional toluene-containing catalyst system. Moreover by using said catalyst the presence of aromatic solvent is drastically reduced.

A further object of the present invention is a solution in an alifatic solvent having from 5 to 30 carbon atoms to be used as catalyst system for the polymerization of olefins comprising the reaction product of methylalumoxane, a organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , wherein U is described above and a metallocene compound.

A further object of the present invention is a process for polymerizing one or more olefins containing from 2 to 20 carbon atoms comprising the step of contacting one or more of said olefins in the presence of the catalyst system described above.

Examples of olefins containing from 2 to 20 carbon atoms, are alpha-olefins of formula  $CH_2=CHT$  wherein T is a hydrogen atoms or a  $C_1$ - $C_{18}$  alkyl radical, such as ethylene, propylene, 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, 4,6-dimethyl-1-heptene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, 1-eicosene; cyclic olefins, and polyenes such as 1,5-hexadiene, 1-6-heptadiene, 2-methyl-1,5-hexadiene, butadiene, isoprene, trans 1,4-hexadiene, cis 1,4-hexadiene, 6-methyl-1,5-heptadiene, 3,7-dimethyl-1,6-octadiene, 11-methyl-1,10-dodecadiene, 5-ethylidene-2-norbornene.

The catalyst of the present invention is especially designed for the solution polymerization process, therefore a further object of the present invention is a solution polymerization process for polymerizing one or more olefins containing from 2 to 20 carbon atoms comprising the step of contacting one or more of said olefins in the presence of the catalyst system described above.

Preferred olefin to be used according to the process of the present invention are ethylene, propylene, 1-butene, 1-pentene, 1-hexene and 1-octene and mixtures thereof.

As reported above by using the catalyst system of the present invention a polymer having an high molecular weight can be obtained.

Therefore it is a further object of the present invention a 1-butene homopolymer having the following features:

- (i) intrinsic viscosity measured in tetrahydronaphtalene (THN) at 135°C higher than 2.5; preferably higher than 3
- (ii) distribution of molecular weight  $M_w/M_n$  comprised between 2 and 4; preferably between 2 and 3; and
- (iii) melting point comprised between 100°C and 115°C; preferably between 100°C and 110°C.

The following examples are reported for illustrative and not limiting purposes.

## **EXAMPLES**

### **GENERAL PROCEDURES AND CHARACTERIZATIONS**

#### **Chemicals.**

All chemicals must be handled using standard Schlenk techniques.

Methylalumoxane (MAO) was received from Albemarle as a 30% wt/vol toluene solution ( $d = 0.83$  g/cc) and used as such.

In the catalyst example C-5, the cocatalyst employed was MAO 10 %wt/vol, used as received from Crompton AG (toluene solution 1.7 M in Al).

Pure triisobutylaluminum (TIBA) was used as such.

Isododecane was purified over alumina to reach a water content below 10 ppm.

A 101 g/L TIBA/isododecane solution was obtained by mixing the above components.

The melting points of the polymers ( $T_m$ ) were measured by Differential Scanning Calorimetry (D.S.C.) on a Perkin Elmer DSC-7 instrument, according to the standard method. A weighted sample (5-7 mg) obtained from the polymerization was sealed into aluminum pans and heated to 180°C at 10°C/minute. The sample was kept at 180°C for 5 minutes to allow a complete melting of all the crystallites, then cooled to 20°C at 10°C/minute. After standing 2 minutes at 20°C, the sample was heated for the second time to 180°C at 10°C/min. In this second heating run, the peak temperature was taken as the melting temperature ( $T_m$ ) and the area of the peak as melting enthalpy ( $\Delta H_f$ ).

Molecular weight parameters were measured using a Waters 150C ALC/GPC instrument (Waters, Milford, Massachusetts, USA) equipped with four mixed-gel columns PLgel 20  $\mu$ m Mixed-A LS (Polymer Laboratories, Church Stretton, United Kingdom). The

dimensions of the columns were  $300 \times 7.8$  mm. The solvent used was TCB and the flow rate was kept at 1.0 mL/min. Solution concentrations were 0.1 g/dL in 1,2,4 trichlorobenzene (TCB). 0.1 g/L of 2,6-di-*t*-butyl-4-methyl phenol (BHT) was added to prevent degradation and the injection volume was 300  $\mu$ L. All the measurements were carried out at 135°C. GPC calibration is complex, as no well-characterized narrow molecular weight distribution standard reference materials are available for 1-hexene polymers or 1-butene polymers. Thus, a universal calibration curve was obtained using 12 polystyrene standard samples with molecular weights ranging from 580 to 13,200,000. It was assumed that the  $K$  values of the Mark-Houwink relationship were:  $K_{PS} = 1.21 \times 10^{-4}$ , dL/g and  $K_{PB} = 1.78 \times 10^{-4}$  dL/g for polystyrene and poly-1-butene respectively. The Mark-Houwink exponents  $\alpha$  were assumed to be 0.706 for polystyrene and 0.725 for poly-1-butene. Even though, in this approach, the molecular parameters obtained were only an estimate of the hydrodynamic volume of each chain, they allowed a relative comparison to be made.

Rac dimethylsilyl{(2,4,7-trimethyl-1-indenyl)-7-(2,5-dimethyl-cyclopenta[1,2-*b*:4,3-*b'*]-dithiophene)} zirconium dimethyl (A-1) was prepared according to the following procedure: the ligand, [3-(2,4,7-trimethylindenyl)][7-(2,5-dimethyl-cyclopenta[1,2-*b*:4,3-*b'*]-dithiophene)]dimethyl silane, was prepared as described in WO 01/47939. 30.40 g of this ligand (72.26 mmol) and 170 ml of anhydrous THF were charged under nitrogen in a cylindrical glass reactor equipped with magnetic stirring bar. The brown solution so obtained was cooled and maintained at 0°C, while 58.4 ml of *n*-BuLi 2.5M in hexane (146 mmol) were added dropwise via dropping funnel. At the end of the addition, the dark brown solution was stirred for 1 hour at room temperature, then cooled to -50°C, and then 48.6 ml of MeLi 3.05 M in diethoxymethane (148.2 mmol) were added to it. In a Schlenk, 16.84 g of ZrCl<sub>4</sub> (72.26 mmol) were slurried in 170 ml of toluene. Both mixtures were kept at -50°C and the ZrCl<sub>4</sub> slurry was quickly added to the ligand dianion solution. At the end of the addition, the reaction mixture was allowed to reach room temperature and stirred for an additional hour. A yellow-green suspension was obtained. <sup>1</sup>H NMR analysis shows complete conversion to the target complex. All volatiles were removed under reduced pressure, and the obtained free flowing brown powder was suspended in 100 ml of Et<sub>2</sub>O. After stirring for a few minutes, the suspension was filtered over a G4 frit. The solid on the frit was then washed twice with Et<sub>2</sub>O (until the washing solvent turns from brown to yellow), then dried under vacuum, and finally extracted on the frit with warm toluene (60°

C), until the filtering solution turns from yellow to colorless (about 650 ml of toluene); The extract was dried under reduced pressure to give 28.6 g of yellow powder, which  $^1\text{H-NMR}$  showed to be the target complex, free from impurities. The yield based on the ligand was 73.3%.

$^1\text{H-NMR}$ : ( $\text{CD}_2\text{Cl}_2$ , r.t.), ppm: -2.09 (s, 3H), -0.79 (s, 3H), 1.01(s, 3H), 1.04 (s, 3H), 2.38 (s, 3H), 2.39 (s, 3H), 2.43 (d, 3H,  $J = 1.37$  Hz), 2.52 (s, 3H), 2.57 (d, 3 H,  $J = 1.37$  Hz), 6.61(dq, 1 H,  $J = 7.04$  Hz,  $J = 0.78$  Hz), 6.81 (q, 1H,  $J = 1.37$  Hz), 6.85 (dq, 1H,  $J = 7.04$  Hz,  $J = 0.78$  Hz), 6.87 (q, 1H,  $J = 1.37$  Hz), 6.91 (s, 1H).

Rac dimethylsilyl{(2,4,7-trimethyl-1-indenyl)-7-(2,5-dimethyl-cyclopenta[1,2-b:4,3-b']-dithiophene)} zirconium dichloride (A-2) was prepared according to WO 01/47939.

### **Preparation of catalyst systems**

#### **Example 1 Preparation of catalyst system C-1**

3.6 cc of TIBA/isododecane were mixed with 2.15 cc of the 10% MAO/toluene solution (MAO/TIBA, molar ratio 2:1). Then, 15mg of A-1 were dissolved with this solution. The color of the resulting solution was red-violet. Distillation at reduced pressure and  $50^\circ\text{C}$  was carried out until a volume of 2.12 cc was removed from the solution. The final solution was clear and dark-violet, without traces of solid.  $\text{Al}_{\text{tot}}/\text{Zr} = 200$ ; MAO/TIBA 2:1 mol/mol. This solution was used to perform 1-hexene polymerization, see Table 1.

#### **Comparative Example 2 Preparation of catalyst system C-2**

This example was carried out as example 1 by using 13 mg of A-1 and 2.8 cc of MAO/toluene 10%. The mixing was carried out at room temperature, no distillation process was carried out. The resulting clear red-violet solution was used as such for 1-hexene polymerization after 10 min from its preparation.  $\text{Al}/\text{Zr} = 200$ . This solution was used to perform 1-hexene polymerization, see Table 1.

#### **Example 3 Preparation of catalyst system C-3**

9.7 cc of TIBA/isododecane solution were mixed with 1.9cc of 30% MAO/toluene solution (MAO/TIBA, molar ratio 2:1). Then, 20 mg of A-1 were dissolved with this solution. The metallocene was completely soluble, the dark violet solution did not show any trace of residual solid. The final solution was obtained upon recovery of 2.0 cc by distillation. MAO/TIBA 2:1 mol/mol;  $\text{Al}_{\text{tot}}/\text{Zr} = 400$ . This solution was used to perform 1-hexene polymerization, see Table 1.

**Example 4 Preparation of catalyst system C-4**

A catalytic solution was prepared using a 10L jacketed stirred tank reactor equipped with a condenser. Under a nitrogen flow, 2300 g of a 110 g/L TIBA solution in isododecane and 790 mL of a 30% wt/wt MAO solution in toluene (Albemarle,  $d=0.83$  g/mL) were loaded into the vessel and allowed to react for 1 hour under stirring at room temperature. After this time 13.5 g of A-1 was added to form the catalyst solution. The obtained purple solution was then diluted with further 1460 g of isododecane to reach the desired final concentration. The reactor temperature was increased up to 55°C and the pressure reduced to 14 mbar-a using a vacuum pump to remove the toluene via distillation. In 3 hours, 660 cc was condensed of a mixture 75/25 mol/mol toluene/isododecane. The residual toluene in the catalytic solution was < 1%wt. 3900 g of catalytic solution was obtained with the following analysis:

Al 3.4%wt, Zr 580 ppm with an Al/Zr molar ratio of 203 and a catalytic system (catalyst + cocatalyst) concentration of 107 g/L. This solution was used to perform 1-butene polymerization tests.

**Comparative examples 5 Preparation of catalyst system C-5**

The catalyst mixtures were prepared by dissolving A-2 with the proper amount of the MAO/toluene solution needed to achieve Al/Zr ratios of 200 and 500. The solutions were stirred for 10 min at room temperature before being used to perform 1-butene polymerization tests. The polymerization conditions and the characterization data of the obtained polymers are reported in Table 2.

**Polymerization tests****1-hexene polymerization, general procedure.**

To 20g of liquid 1-hexene an amount of the catalyst solution obtained as reported above containing 0.5 mg of metallocene, is added at 50°C. After 30 minutes, the polymerization is stopped with ethanol. Then, acetone is added to separate the polymer. Finally, the polymer is dried at 50°C under vacuum for several hours. In examples 3-6, polymerization tests were repeated after several days by using the same catalyst solution in order to test the change in activity. The results of the 1-hexene polymerization tests are reported in Table 1.

**1-butene polymerization in autoclave, general procedure.**

A 4-L jacketed stainless-steel autoclave, equipped with a magnetically driven stirrer and a Flow Record & Control system is used. All fluxes, pressure and temperatures into the autoclave are controlled via DCS PC. Before each test, the autoclave is cleaned

with hot nitrogen (1.5 barg N<sub>2</sub>, 70°C, 1 hour). Then, 1350 g of 1-butene and 6 mmol of Al(*i*-Bu)<sub>3</sub> (as a 1M solution in hexane) are charged at room temperature. Then, the autoclave is thermostated at the polymerization temperature, the solution containing the catalyst/cocatalyst mixture is injected into the autoclave through a stainless-steel vial by means of nitrogen pressure. In example 13 300 ml of hydrogen are injected into the autoclave before the injection of the catalyst solution. The polymerizations are carried out at constant temperature for 1h. Then, stirring is interrupted, and the pressure into the autoclave is raised to 20 bar-g with nitrogen. The 1-butene/poly-1-butene mixture is discharged from the bottom into a heated steel tank containing water at 70°C. The tank heating is switched off and a flow of nitrogen at 0.5 bar-g is fed. After cooling at room temperature, the steel tank is opened and the wet polymer collected. The wet polymer is dried in an oven under reduced pressure at 70°C. Intrinsic viscosity (I.V.) of the polybutenes were measured in THN at 135°C.

The polymer obtained in example 9 was characterized it has an I.V. of 3.05; the distribution of molecular weight (Mw/Mn) of 2.8 and a melting point (T<sub>m2</sub>) of 103°C.

**Table 1.** 1-hexene polymerization results.

Ex	Cat.	Ageing, days	Yield, g	Activity Kg/g <sub>meth</sub>	Activity Kg/g <sub>otsolidh</sub>	Activity Kg/g <sub>MAOH</sub>	Mw, GPC	Mn, GPC
1	C-1	0	11.4	45.6	2.1	1.2	355049	128232
2*	C-2	0	10.4	41.5	1.9	1.1	236433	76258
3	C-3	1	13.46	53.8	2.45	1.4	n.a.	n.a.
4		4	12.63	50.5	2.30	1.3	n.a.	n.a.
5		11	11.4	45.6	2.07	1.2	n.a.	n.a.
6		14	12.7	50.8	2.31	1.3	n.a.	n.a.

n.a. not available

\* comparative

By comparing the performance of the catalyst system of example 1 and comparative example 2, it results that polymer of higher molecular weights can be obtained by using the catalytic solutions prepared according to the present invention. Moreover, Example 3 shows that the catalytic activity remains substantially unchanged upon ageing.

**Table 2.** 1-butene polymerization data.

Ex	Cat.	mg <sup>+</sup>	Al(MAO)/Zr	T <sub>pol</sub>	Yield (g)	activity kg/(gMAO*h)	I.V. (dL/g, THN)
7*	C-5	2	500	60	130	1.3	2.37
8*	C-5	2	500	80	100	1.0	1.33
9	C-4	2.7	135	60	119	3.3	3.04
10	C-4	2.7	135	70	140	3.9	2.45
11	C-4	2.7	135	80	137	3.8	1.64
12#	C-4	1.35	135	70	159	8.8	1.19

<sup>+</sup> mg of metallocene compound used. \* comparative. # 300 ml of H<sub>2</sub> were added.

By comparing the polymerization results of comparative examples in which the catalyst system is solubilized in toluene with those according to the invention, it is evident that, as found in the 1-hexene polymerizations, the increasing of the polymer molecular weights represents an advantage of the present catalyst formulation. Moreover the activity of the catalyst system of the invention is higher than that of the prior art (comparative examples 7-9).

**Claims**

1. A catalytic solution obtainable by a process comprising the following steps:
  - a) contacting a solution of methylalumoxane (MAO) in an aromatic solvent (solvent a) with a solution in a solvent (solvent b) of one or more alumoxanes different from methylalumoxane or one or more organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , where the U substituents, same or different, are hydrogen atoms, halogen atoms, or hydrocarbon group containing from 2 to 20 carbon atoms, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen and at least one U is different from hydrogen, and j ranges from 0 to 1, being also a non-integer number;
  - (b) when solvent b) is an aromatic solvent or solvent b) has a boiling point lower than solvent a) adding to the solution formed in step a) an alifatic solvent (solvent c) having a boiling point higher than solvent a) and solvent b);
  - (c) solubilizing a metallocene compound in the solution obtained in step a) or in step b); and
  - (d) substantially removing the aromatic solvent(s) (solvent a) or solvent a) and solvent b). if step b) has been carried out) from the solution;wherein the content of the aromatic solvent(s) in the solution obtained in step d) is lower than 2% by weight; the molar concentration of the metallocene compound in the final solution obtained in step d) ranges from  $1 \cdot 10^{-5}$  to  $1 \cdot 10^{-1}$  mol/l, and the molar ratio between methylalumoxane and the organo-aluminium compound or the molar ratio between methylalumoxane and the alumoxane used in step b) ranges from 10:1 to 1:10.
2. The catalyst system solution according to claim 1 obtainable with the process comprising the following steps:
  - a1) contacting a solution of methylalumoxane in an aromatic solvent (solvent a) with a solution of one or more organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$  in an alifatic solvent (solvent b) having a boiling point higher than solvent a), where the U substituents, same or different, are hydrogen atoms, halogen atoms, or hydrocarbon groups containing from 2 to 20 carbon atoms, optionally containing silicon or germanium atoms, with the proviso that at least one U is different from halogen and from hydrogen, and j ranges from 0 to 1, being also a non-integer number;
  - b1) solubilizing a metallocene compound in the solution obtained in step a1); and

c1) substantially removing solvent a) from the solution.

wherein the content of solvent a) in the solution obtained in step c1) is lower than 2% by weight;; and the molar concentration of the metallocene compound in the final solution obtained in step c1) ranges from  $1 \cdot 10^{-5}$  to  $1 \cdot 10^{-1}$  mol/l, and the molar ratio between methylalumoxane and the organo-aluminium compound ranges from 10:1 to 1:10..

3. The catalyst system solution according to claims 1 or 2 wherein in the organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , U is a linear or branched  $C_1$ - $C_{20}$ -alkyl radical.
4. The catalyst system solution according to any one of claims 1 to 3 wherein solvent a) used in step a) or a1) to obtain a solution of methylalumoxane is an aromatic solvent having from 6 to 12 carbon atoms.
5. The catalyst system solution according to any one of claims 1 to 4 wherein solvent b) is an alifatic solvent having from 5 to 30 carbon atoms.
6. The catalyst system solution according to claim 5 wherein solvent b) is isododecane, isoheptadecane, isoeicosane.
7. The catalyst system solution according to any one of claims 1 to 6 wherein solvent b) has a boiling point higher than  $110^\circ\text{C}$ .
8. The catalyst system solution according to any one of claims 1 to 7 wherein step d) or c1) is carried out by distilling the solution containing the catalyst system obtained in step b) or b1).
9. A solution to be used as catalyst system for the polymerization of olefins comprising the reaction product of methylalumoxane, a organo-aluminium compound of formula  $H_jAlU_{3-j}$  or  $H_jAl_2U_{6-j}$ , wherein U is described above and a metallocene compound solubilized in an alifatic solvent having from 5 to 30 carbon atoms.
10. A process for polymerizing one or more olefins containing from 2 to 20 carbon atoms comprising the step of contacting one or more of said olefins in the presence of the catalyst system of claims 1 to 9.
11. A solution polymerization process according to claim 10, for polymerizing one or more olefins containing from 2 to 20 carbon atoms comprising the step of contacting one or more of said olefins in the presence of the catalyst system of claims 1 to 9.

12. A polymerization process according to claims 10 or 11 wherein , said olefins are alpha-olefins of formula  $\text{CH}_2=\text{CHT}$  wherein T is a hydrogen atoms or a  $\text{C}_1\text{-C}_{18}$  alkyl radical.
13. A 1-butene homopolymer having the following features:
  - (i) intrinsic viscosity measured in tetrahydronaphtalene (THN) at  $135^\circ\text{C}$  higher than 2.5; preferably higher than 3
  - (ii) distribution of molecular weight  $\text{Mw/Mn}$  comprised between 2 and 4; and
  - (iii) melting point comprised between  $100^\circ\text{C}$  and  $115^\circ\text{C}$ .

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number  
**WO 2005/095468 A3**

(51) International Patent Classification:  
*C08F 110/08* (2006.01) *C08F 4/602* (2006.01)

(21) International Application Number:  
PCT/EP2005/002479

(22) International Filing Date: 8 March 2005 (08.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
04101020.8 12 March 2004 (12.03.2004) EP  
60/554,110 17 March 2004 (17.03.2004) US

(71) Applicant (for all designated States except US): **BASELL POLYOLEFINE GMBH** [DE/DE]; Brühler Strasse 60, 50389 Wesseling (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RESCONI, Luigi** [IT/IT]; Via Palestro, 101, I-44100 Ferrara (IT). **MOSCARDI, Gilberto** [IT/IT]; Via Fossato, 26, I-44100 Ferrara (IT). **FAIT, Anna** [IT/IT]; Via Palestro, 101, I-44100 Ferrara (IT).

(74) Agent: **SACCO, Marco**; Basell Poliolefine Italia S.p.A., Intellectual Property, P.le G. Donegani, 12, I-44100 Ferrara (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

(88) Date of publication of the international search report:  
25 January 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CATALYST SYSTEM FOR THE POLYMERIZATION OF OLEFIN

(57) Abstract: A catalyst system solution obtainable by a process comprising the following steps: a) contacting a solution of methylalumoxane in an aromatic solvent (solvent a) with a solution of one or more organ-aluminium in a solvent (solvent b), or a solution of one or more alumoxanes different from methylalumoxane in a solvent (solvent b); (b) when solvent b) is an aromatic solvent or if solvent b) has a boiling point lower than solvent a) add to the solution formed in step a) an alifatic solvent (solvent c) having a boiling point higher than solvent a) and solvent b); or (c) solubilizing a metallocene compound in the solution obtained in step a) or in step b); and (d) substantially removing solvent a) or solvent a) and solvent b) from the solution.



WO 2005/095468 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2005/002479

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08F110/08 C08F4/602

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 480 390 A (HOECHST AKTIENGESSELLSCHAFT) 15 April 1992 (1992-04-15) example 14 -----	1-8, 10-12
X	WO 98/18801 A (AKZO NOBEL N.V.) 7 May 1998 (1998-05-07)	9-12
Y	examples 9,10 -----	1-8
Y	US 5 066 631 A (SANGOKOYA ET AL) 19 November 1991 (1991-11-19) column 16 - column 48 column 3, line 9 - line 27 -----	1-8
X	US 6 664 208 B1 (FUJITA MASAYUKI ET AL) 16 December 2003 (2003-12-16) examples 1,2 ----- -/-	13

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## ° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

27 May 2005

Date of mailing of the international search report

03/06/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fischer, B

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2005/002479

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 172 961 A (MITSUI PETROCHEMICAL INDUSTRIES, LTD) 5 March 1986 (1986-03-05) examples 2,3	13
A	----- US 5 043 515 A (SLAUGH ET AL) 27 August 1991 (1991-08-27)	1
A	----- US 5 847 177 A (SANGOKOYA ET AL) 8 December 1998 (1998-12-08) -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/002479

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0480390	A	15-04-1992	DE 4032266 A1	16-04-1992
			AT 155495 T	15-08-1997
			AU 650676 B2	30-06-1994
			AU 8578391 A	16-04-1992
			CA 2053199 A1	12-04-1992
			DE 59108781 D1	21-08-1997
			EP 0480390 A2	15-04-1992
			ES 2106754 T3	16-11-1997
			GR 3024857 T3	30-01-1998
			JP 4264110 A	18-09-1992
			ZA 9108075 A	24-06-1992
-----				
WO 9818801	A	07-05-1998	US 5777143 A	07-07-1998
			AT 211477 T	15-01-2002
			BR 9712553 A	19-10-1999
			CA 2269667 A1	07-05-1998
			DE 69709890 D1	28-02-2002
			DE 69709890 T2	20-06-2002
			WO 9818801 A1	07-05-1998
			EP 0934322 A1	11-08-1999
			ES 2166985 T3	01-05-2002
			JP 2001502714 T	27-02-2001
			PT 934322 T	28-06-2002
-----				
US 5066631	A	19-11-1991	CA 2052062 A1	17-04-1992
			DE 69115432 D1	25-01-1996
			DE 69115432 T2	02-05-1996
			EP 0482453 A2	29-04-1992
			JP 3246756 B2	15-01-2002
			JP 4297482 A	21-10-1992
-----				
US 6664208	B1	16-12-2003	US 2004224838 A1	11-11-2004
-----				
EP 0172961	A	05-03-1986	EP 0172961 A1	05-03-1986
			AT 38044 T	15-11-1988
			DE 3474673 D1	24-11-1988
-----				
US 5043515	A	27-08-1991	CA 2000182 A1	27-04-1990
			DE 68904522 D1	04-03-1993
			DE 68904522 T2	13-05-1993
			EP 0366212 A1	02-05-1990
			JP 2169526 A	29-06-1990
			JP 2664498 B2	15-10-1997
-----				
US 5847177	A	08-12-1998	CA 2265621 A1	16-04-1998
			DE 69704433 D1	03-05-2001
			DE 69704433 T2	08-11-2001
			EP 0932610 A1	04-08-1999
			ES 2155671 T3	16-05-2001
			JP 2001501953 T	13-02-2001
			WO 9815558 A1	16-04-1998
-----				